2SK595

T-29-25

2025

N-Channel Junction Silicon FET

Capacitor Microphone Applications

©2206

Features

- Especially suited for use in audio, telephone capacitor microphones
- Excellent voltage characteristic
- Excellent transient characteristic
- Adoption of FBET process

Absolute Maximum Ratings at Ta=25°C

			unit
Gate to Drain Voltage	V_{GDO}	-20	V
Gate Current	I_G	10	mA
Drain Current	I_D	1	mA
Allowable Power Dissipation	P_D	100	mW
Junction Temperature	Tj	125	°C
Storage Temperature	Tstg	-55 to +125	°C

Electrical Characteristics at Ta=25°C

			min	typ	max	unit
Gate to Drain Breakdown Voltage	$V_{(BR)GDO}$	I_G=-100uA	-20			V
Cutoff Voltage	$V_{GS(off)}$	V_{DS}=5V,I_D=1uA		-0.6	-1.5	V
Drain Current	I_{DSS}	V_{DS}=5V,V_{GS}=0	100*		800*	uA
Forward Transfer Admittance	$\|y_{fs}\|$	V_{DS}=5V,V_{GS}=0,f=1kHz	0.4	1.2		mS
Input Capacitance	C_{iss}	V_{DS}=5V,V_{GS}=0,f=1MHz		3.5		pF
Reverse Transfer Capacitance	C_{rss}	V_{DS}=5V,V_{GS}=0,f=1MHz		0.65		pF

*: The 2SK595 is classified by I_{DSS} as follows (unit:uA):

100	20	170	150	21	240	210	22	350	320	23	480	440	24	800

[Ta=25°C,V_{CC}=4.5V,R_L=1kohm,Cin=15pF,See specified Test Circuit.]

			min	typ	max	unit
Voltage Gain	G_V	V_{in}=10mV,f=1kHz		-3.0		dB
Reduced Voltage Characteristic	$\Delta G_V V$	V_{in}=10mV,f=1kHz, V_{CC}=4.5→1.5V		-1.2	-3.5	dB
Frequency Characteristic	ΔG_{VF}	f=1kHz to 110Hz			-1.0	dB

Continued on next page.

Marking on device: C

I_{DSS} rank: 20,21,22,23,24

Specified Test Circuit

Frequency characteristic
Distortion
Reduced voltage characteristic
Voltage gain

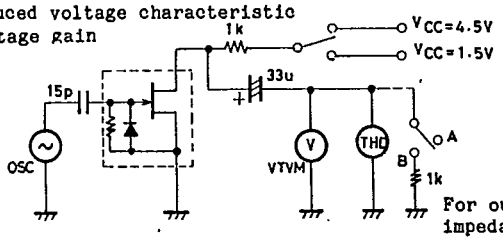

Case Outline 2025
(unit:mm)

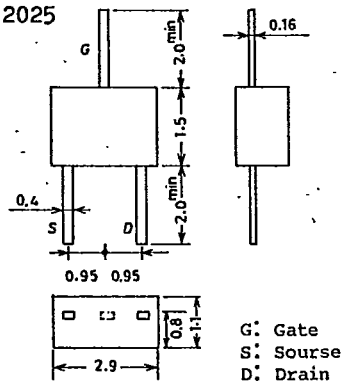

Powered by ICminer.com Electronic-Library Service CopyRight 2003

Continued form preceding page.

			min	typ	max	unit
Input Resistance	Z_{in}	f=1kHz	25			Mohm
Output Resistance	Z_o	f=1kHz			700	ohm
Total Harmonic Distortion	THD	V_{in}=30mV,f=1kHz		1.0		%
Output Noise Voltage	V_{NO}	V_{in}=0,A curve			-110	dB

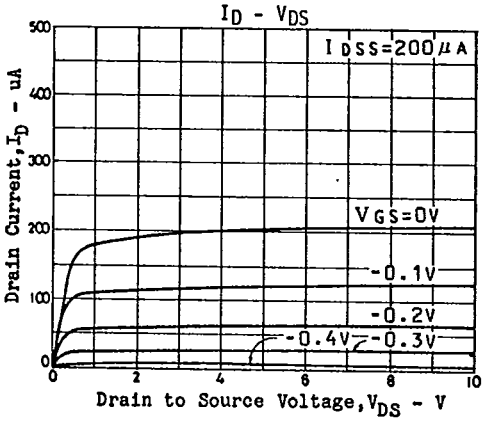

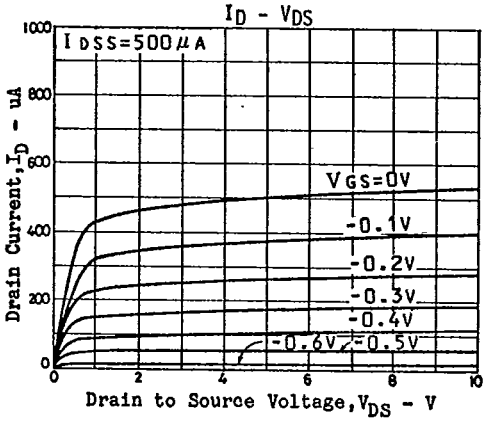

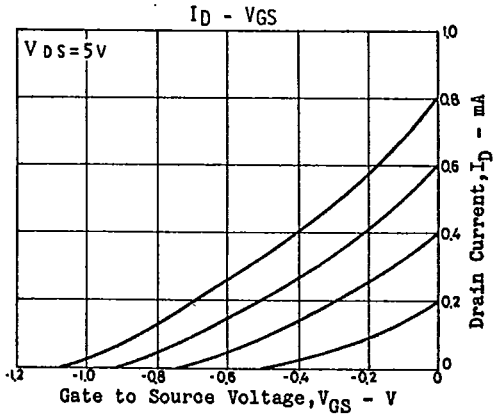

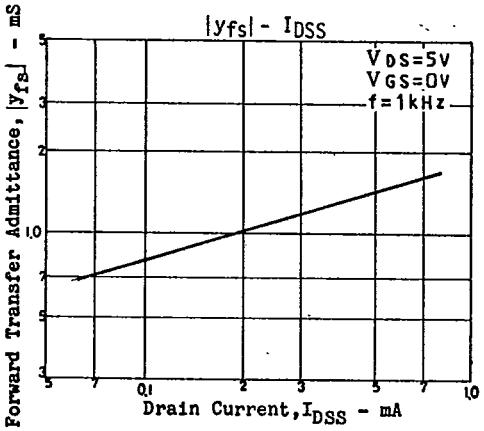

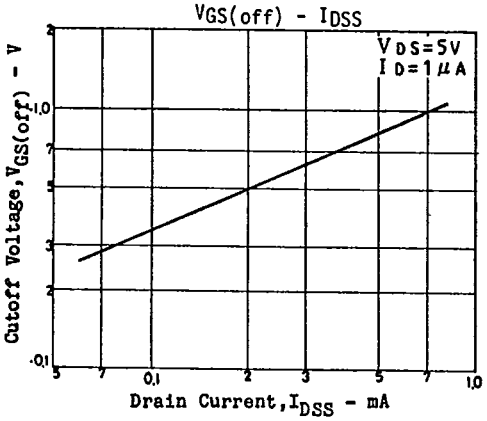

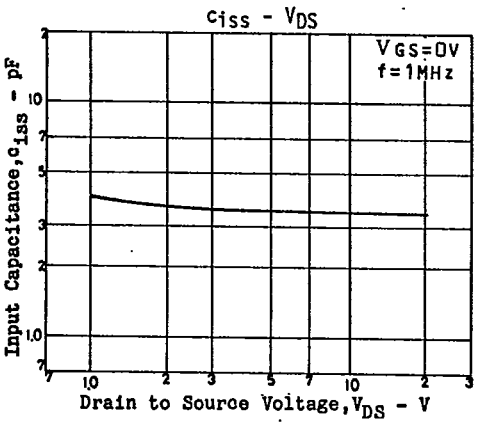

Powered by ICminer.com Electronic-Library Service CopyRight 2003

C_{rss} - V_{DS}

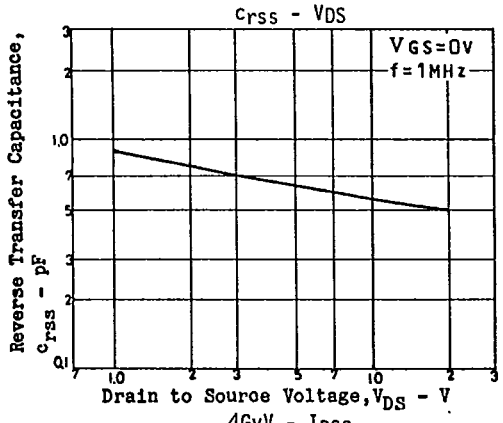

G_V - I_{DSS}

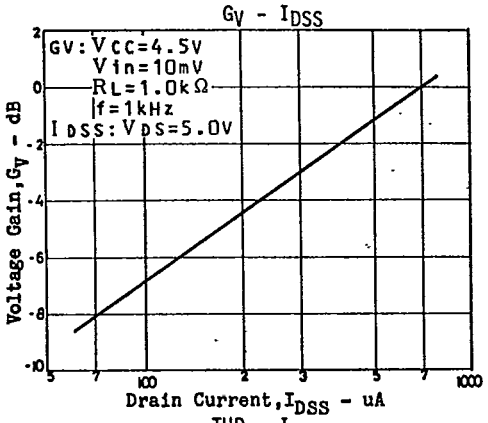

ΔG_VV - I_{DSS}

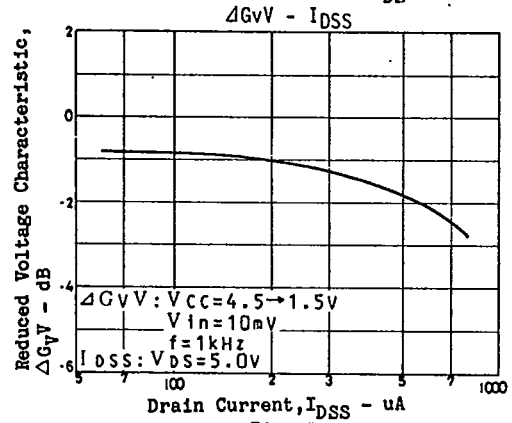

THD - I_{DSS}

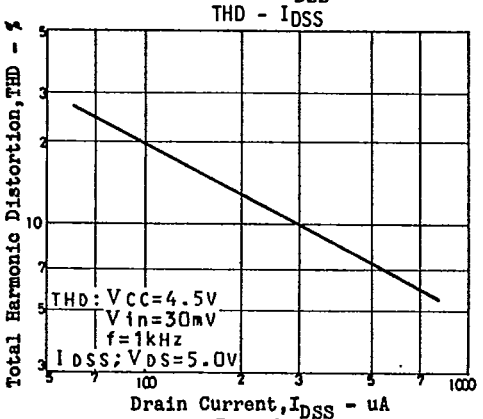

Zi - I_{DSS}

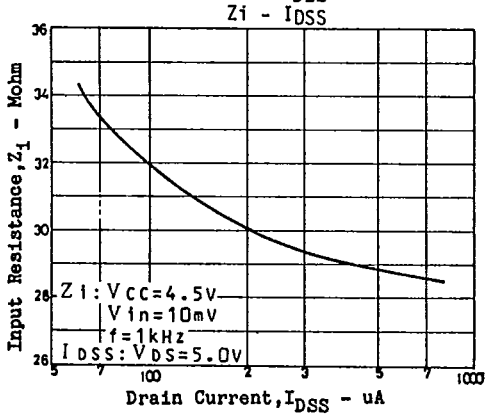

Z_O - I_{DSS}

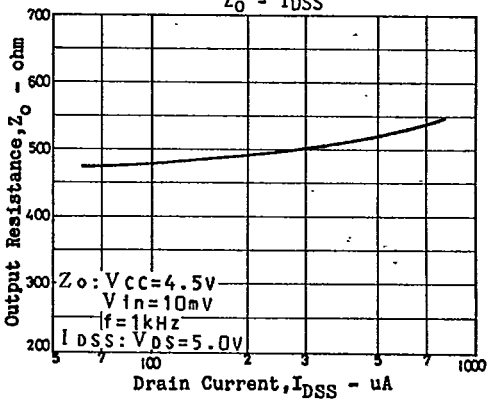

VNO I_{DSS}

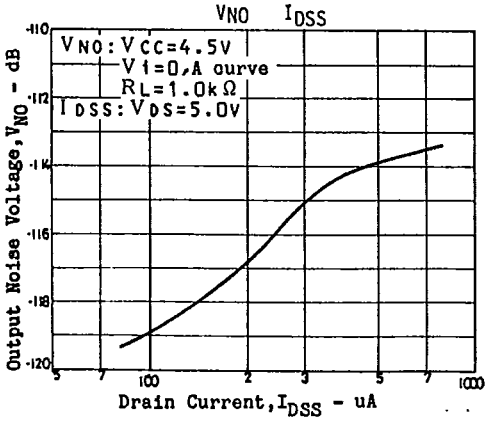

THD - V_{IN}

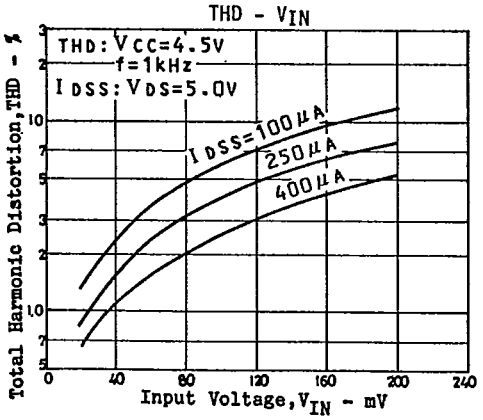

Powered by ICminer.com Electronic-Library Service CopyRight 2003

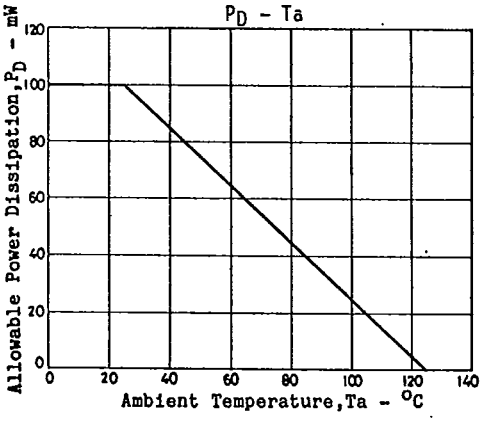

Powered by ICminer.com Electronic-Library Service CopyRight 2003

T-91-20

CASE OUTLINES OF LEAD FORMED SMALL SIGNAL TRANSISTORS

- All of Sanyo lead formed small signal transistor case outlines are illustrated below.
- All dimensions are in mm, and dimensions which are not followed by min. or max. are represented by typical values.
- No marking is indicated.

Case Outline—[2003A] unit: mm

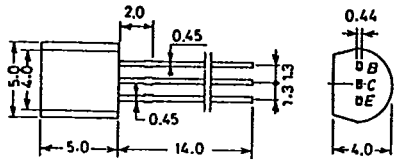

JEDEC: TO-92
EIAJ : SC-43
SANYO: NP

B. Base
C. Collector
E. Emitter

Case Outline—[2019A] unit: mm

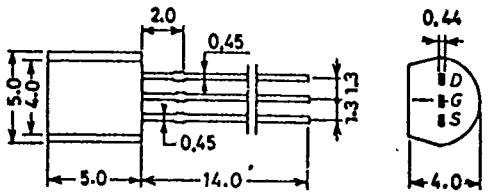

JEDEC: TO-92
EIAJ : SC-43
SANYO: NP

D: Drain
G: Gate
S: Source

Case Outline—[2004A] unit: mm

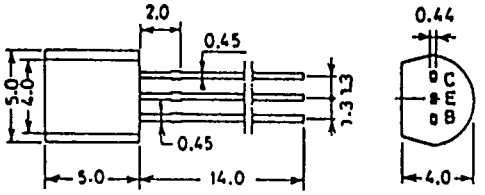

JEDEC: TO-92
EIAJ : SC-43
SANYO: NP

C. Collector
E. Emitter
B. Base

Case Outline—[2025] unit: mm



G: Gate
S: Sourse
D: Drain

Case Outline—[2005A] unit: mm

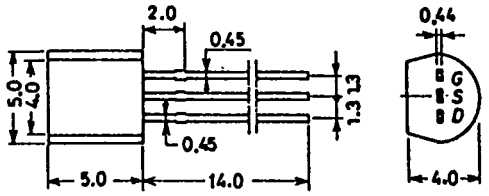

JEDEC: TO-92
EIAJ : SC-43
SANYO: NP

G: Gate
S: Source
D: Drain

Case Outline—[2026] unit: mm

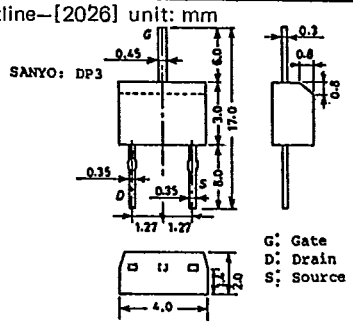

G: Gate
D: Drain
S: Source

Case Outline—[2006A] unit: mm

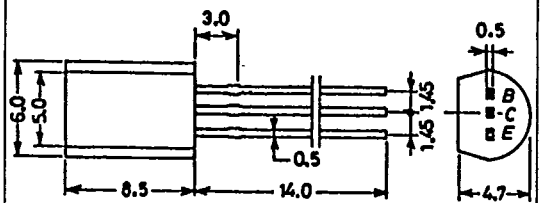

EIAJ: SC-51
SANYO:MP

B: Base
C: Collector
E: Emitter

Case Outline—[2027A] unit: mm



D: Drain
G: Gate
S: Source

SANYO: DP6A

Powered by ICminer.com Electronic-Library Service CopyRight 2003

T-91-20

Case Outline—[2029A] unit: mm



Case Outline—[2061] unit: mm

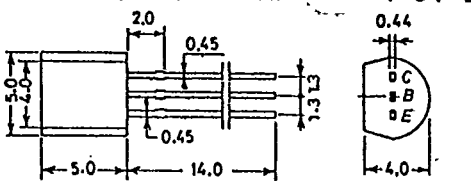

Case Outline—[2033] unit: mm

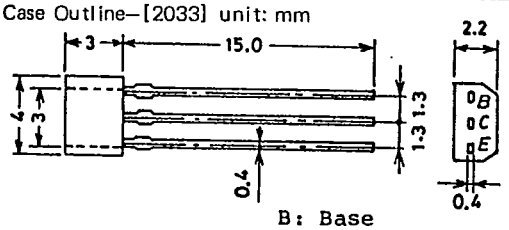

Case Outline—[2064] unit: mm



Case Outline—[2034] unit: mm

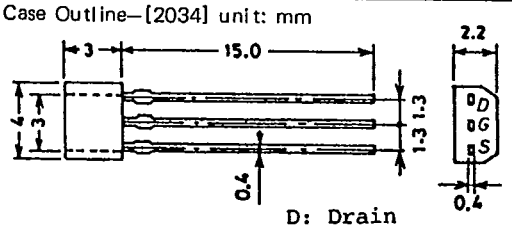

Case Outline—[2040] unit: mm

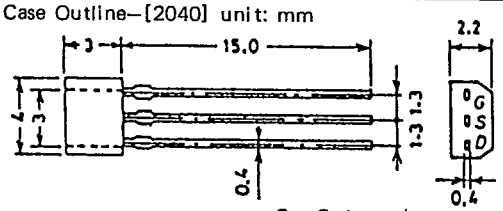

Case Outline—[2051] unit: mm

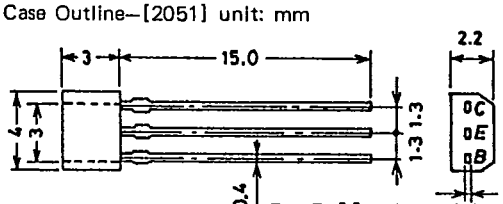

Powered by ICminer.com Electronic-Library Service CopyRight 2003